

Your Mission: Use the F-Response Management Console without a local dongle




Using the F-Response Management Console in legacy "Accelerator" mode, i.e. without a locally attached dongle.

Step 1: Confirm there is a valid F-Response License Manager on your network

You must have a valid and running F-Response License Manager on your network to use the F-Response Management Console without a dongle. Be sure to write down the License Manager machine's network address:port as this forms the License Manager URI that will be necessary to start the Management Console without a local dongle.

Step 2: Open the F-Response Management Console on a machine without a local F-Response Dongle.

When you open the F-Response Management Console on a machine without a local F-Response dongle you will see the following dialog:

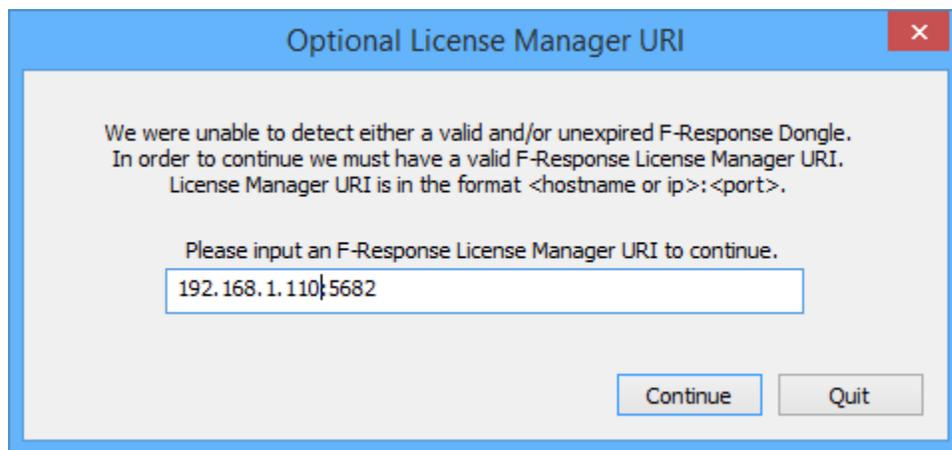


Optional License Manager URI Dialog


Please input the License Manager URI from Step 1 and press Continue.

Step 3: Configure the Accelerator Settings

Since we do not have a local license manager, we need to tell F-Response the username and password to use when attempting to connect to remote F-Response Subjects. This is accomplished through the Subjects->Accelerator Settings... menu.

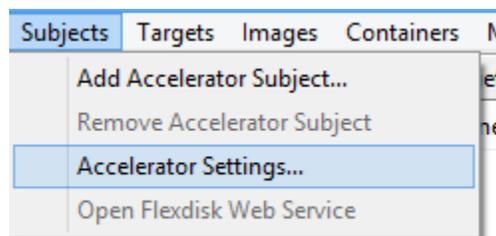


Accelerator Settings Menu

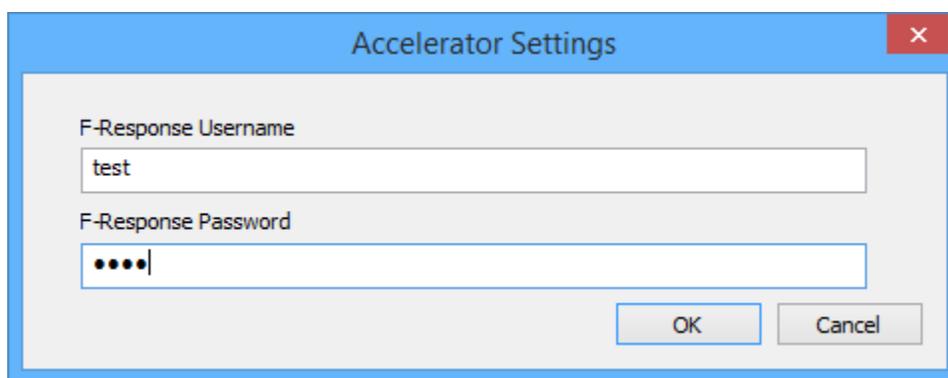


Accelerator Settings Dialog

Step 4: Adding one or more F-Response Subject URIs

Next we need to input one or more F-Response Subject URIs (in the format [IP:F-Response port]) using the Add Accelerator Subject... menu.

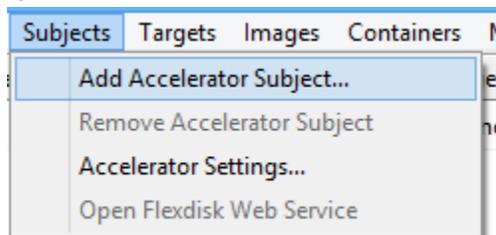


Add Accelerator Subject...

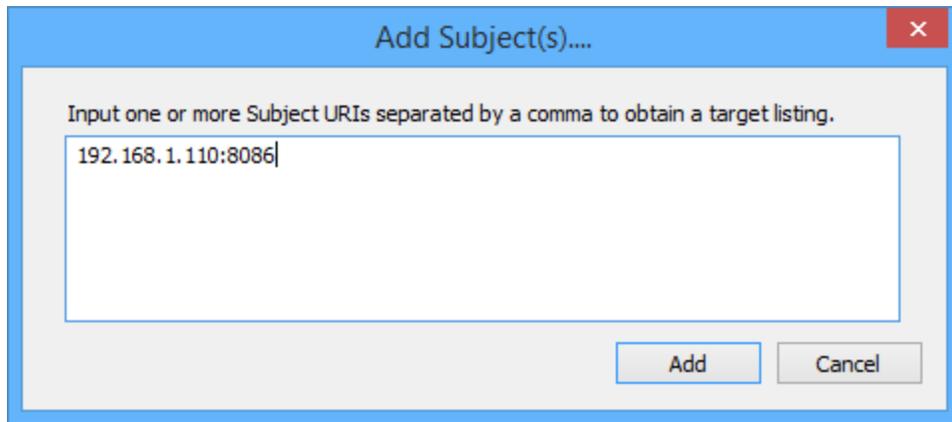

Add Subject(s)... Dialog

Step 5: List and Connect to Targets

Provided you could enumerate one or more F-Response Subjects you should see them listed in the Accelerator Subjects Panel. Click on any subject to show the available targets in the Targets panel.

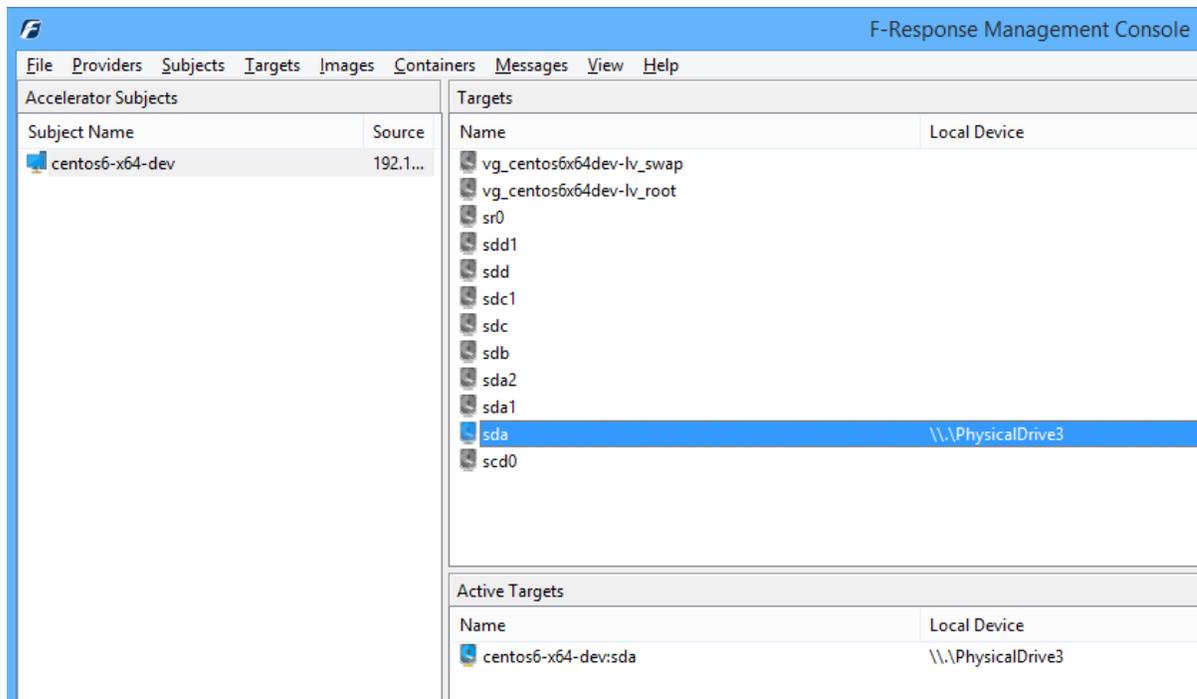


F-Response Management Console

Double click on any targets to mount the target as a physical drive to the local machine.

Step 6: Detach any connected targets and remove the F-Response Subject from the Console

After successfully detaching any connected targets you must remove the F-Response Accelerator Subject from the Console. This is done by selecting the Subject and using the Subject->Remove Accelerator Subject menu item.

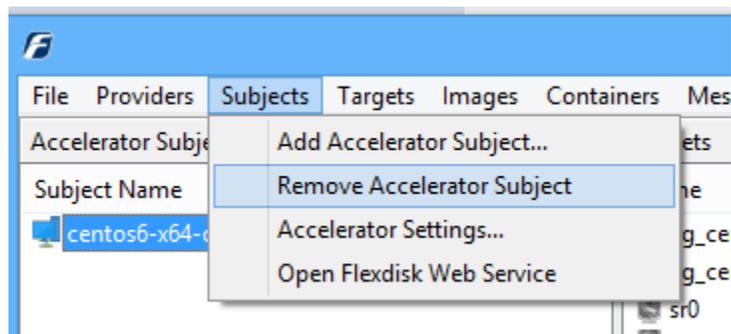

Remove Accelerator Subject